

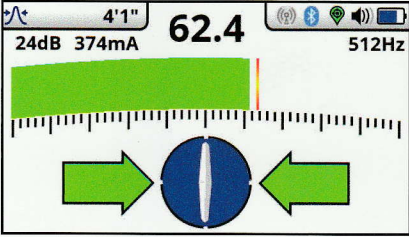
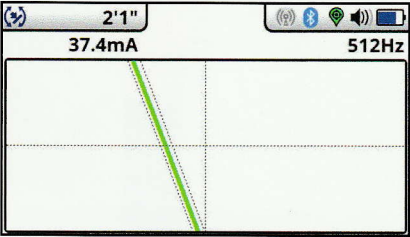
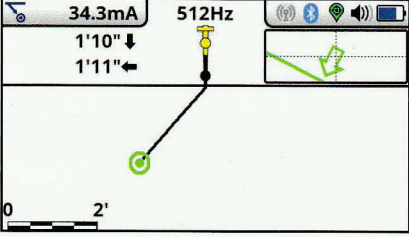
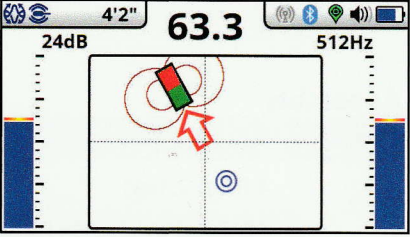


A. Receiver Assembly

Item	Parameter
Weight	4.6lbs (2.1kg)
Dimensions	12.6in(L) x 4.9in(W) x 26.6in(H) (321mm x 124mm x 676mm)
Display Type	Transmissive 480 x 272 Pixel, 16-bit Color, High Visibility LCD, 4.3"
Receiver Antennas	Two sets of 3D antennas
Battery Life	<ul style="list-style-type: none"> - Alkaline – typically 12 hours intermittent use at 70°F (21°C) - Lithium-ion – typically 27 hours intermittent use at 70°F (21°C)
Optional Accessories	<ul style="list-style-type: none"> - A-frame fault locator - Remote Antenna (Stethoscope) - Bluetooth Module - Vehicle Charging DC Lead - Factory fitted radio link to model Loc3-10Tx transmitter - Sondes (waterproof self-contained transmitters for use in pipes & ducts)

B. Operational

Item	Parameter
Internal Data Logging	<ul style="list-style-type: none"> - All parameters stored at each location including depth, current, mode, gain setting, frequency, locate uncertainty, longitude, latitude and height above sea-level - If connected to GPS (via Bluetooth) data also recorded with coordinates and date time.

Operating Frequencies	<p>Configurable frequencies from 16Hz to 200 kHz</p> <p>Power 50Hz and 60Hz</p> <p>Radio 22.7kHz, 10kHz bandwidth</p> <p>Signal Direction - enhanced product model giving direction of outgoing current</p> <table border="1" data-bbox="516 352 938 415"> <tr> <td>SD-USA</td> <td>256Hz/512Hz</td> </tr> <tr> <td>SD-EUR</td> <td>320Hz/640Hz</td> </tr> </table>	SD-USA	256Hz/512Hz	SD-EUR	320Hz/640Hz
SD-USA	256Hz/512Hz				
SD-EUR	320Hz/640Hz				
Operating Modes	<p>- Classic Locate Plan View</p> <div style="display: flex; justify-content: space-around;">   </div> <p>- Vector Locate Sonde locate</p> <div style="display: flex; justify-content: space-around;">   </div> <p>- Transverse Graph Mode</p>				
Compatible Transmitters	Loc-1Tx, Loc-5STx, Loc-5DTx, Loc-10Tx, and Loc3-10Tx				

C. Environmental

Item	Parameter
Temperature Range	Operating: -4°F to 122°F (-20°C to 50°C)
Weather Proof	IP65 and NEMA 4

D. Warranty

Item	Parameter
Warranty	Two years
Item	Parameter

All products are designed and manufactured in accordance with ISO 9001:2008

Disclaimer: Product and accessory specification and availability information is subject to change without prior notice.

ITC

Call us for a no obligation on-site demonstration!

INSTRUMENT TECHNOLOGY CORPORATION

Ph: (800) 519-1998 • Fax: (800) 385-5279 • sales@instecorp.com • www.instecorp.com

Suppliers to the Subsurface Utility Engineering Community Since 1995